


BPC-8931 **RoHS low power and high performance POS PC**

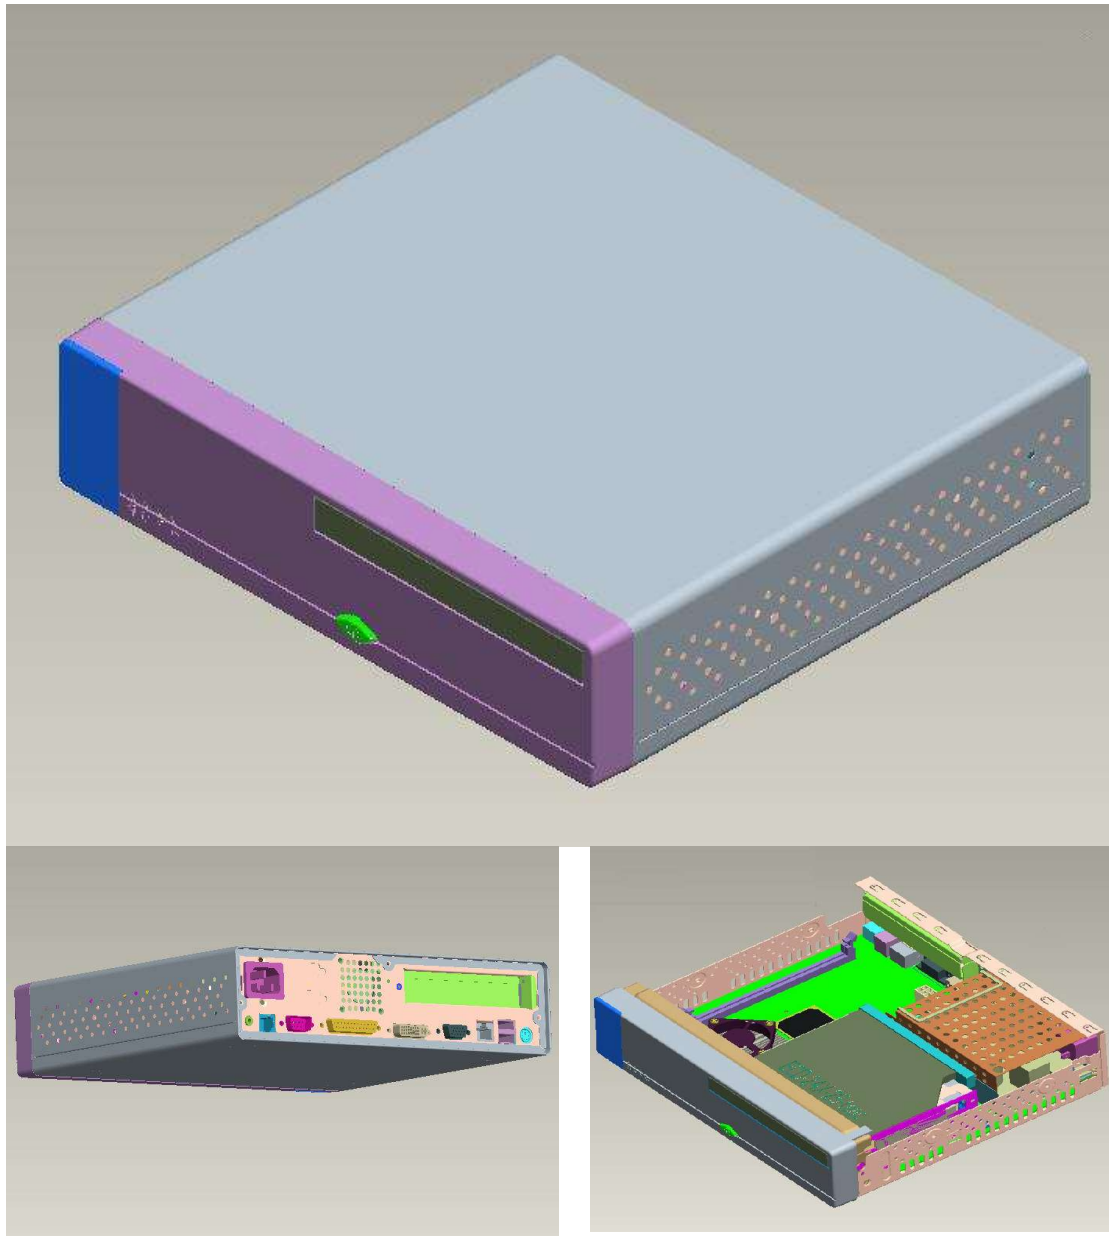

General Specification

1. **Processor:**
VIA C7 1.0GHz (9W) ~ 2.0GHz (20W)
Fanless : C7 1.0G ~ 1.3G / 1.5G Hz / Eden 400MHz ~ 1.2G Hz
2. **Chipset:**
North Bridge CN700, South bridge VT8237R+
3. **Operating System:**
Windows 98/ME/2000/XP/XPe(SP2), Windows CE.NET 4.2/5.0,
Linux8.0/9.0 ,Fedora core1/2,Mandrake 10.1
4. **Memory:**
DDR2 400 /533 Up to 2GB, 1 pcs memory Socket.
5. **I/O Ports:**
 - Front side**
 - 1x LED for power on-off
 - 1x LED for HDD
 - 1x LED for LAN Active
 - 1x LED for LAN ON
 - Rear side**
 - 4x COM (Com 4 with bracket on expansion slot)
 - 1x PS/2 for keyboard and mouse
 - 1x Parallel port (DB25)
 - 1x Giga LAN (RJ45)
 - 1x Cash Drawer port (RJ 11)
 - 2x USB 2.0 Type-A Connector
 - 1x VGA(DB15)
 - 1x DVI
 - 1x Line out
6. **Storage:**
 - 2x Slim 2.5" HDD
 - 1 x 3.5" HDD
 - 1x Slim CD-ROM and 1x slim 2.5 HDD
7. **RAIDm1:**
Mirror Data protection in 1 HDD function support. (VSC6110 chipset)
8. **Keys and Switches:** 1x Power on/off button
9. **LED Indicators:**
Power LED at front panel. Green stands for power on , LAN LED Orange stands for active , HDD LED Red stands for R / W
10. **Expansion:**
1x PCI slot
11. **Power Supply :**
AC 100V ~240V, 50~60Hz input, ATX 110W output(Built-in), System fan type DC
19V ~ 24 V input , ATX 90W output , fanless type. (optional)
12. **Dimension :** 260 mm(W) x 62 mm(H) x 240 mm (D)
13. **Weight :** TBD
14. **Environment Test:**
 - Operating Temperature: 0°~40° C
 - Storage Temperature: -20° ~ 70° C
 - Operating Humidity 20 % ~ 90 %
15. **Certificates :** CE /FCC / UL

Ordering Information

Order No	Description
BPC-8931-C7	POS PC with VIA C7 1.3GHz CPU / 3.5" HDD bracket
BPC-8931-C7-S	POS PC with VIA C7 1.3GHz CPU / 2.5" HDD /CD-ROM bracket
BPC-8931-C7-S1	POS PC with VIA C7 1.3GHz CPU/ 2x2.5" HDD bracket

* SDRAM, HDD ,slim HDD and CD-ROM are available as optional items

Dimensions Drawing

